## **CONFIDENTIAL & PROPRIETARY**


All data contained in this document is sole property of **DRY SYSTEMS TECHNOLOGIES** and is considered confidential and proprietary.

This document may not be reproduced, released to third parties, or used for purposes other than for which it was furnished, without express written consent of DRY SYSTEMS TECHNOLOGIES.

This document remains property of **DRY SYSTEMS TECHNOLOGIES** and must be returned upon request.

## M350-677-02 REPLACEMENT BAR, FORK CARRIER

Requires 2 - 5/8 X 5 1/2 Hex Head Capscrew w/ Toplock Nuts

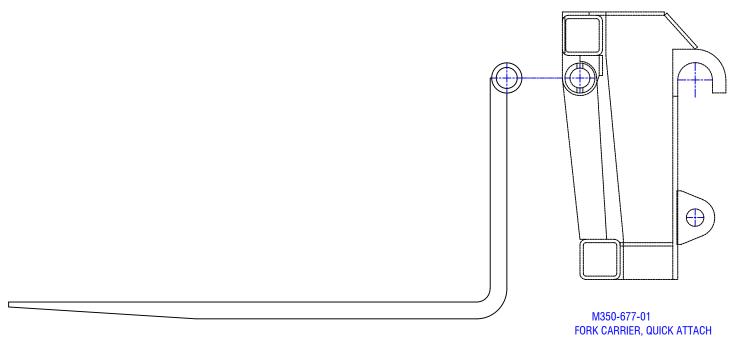

M350-669-02 FORK, QUICK ATTACH, 72"

MAXIMUM CAPACITY PER PAIR - 19,100 LBS AT 24"

TOLERANCES					DRY SYSTEMS	DESCRIPTION			NO REQ'D	
Linear unless noted					DITTOTOTEMO	QUICK	ATTACH FORK CA	ARRIER	1	4 T T T T T T T T T T T T T T T T T T T
Machined: +0.005	ı				TECHNOLOGIES	SCALE	DATE	DRAWN BY		and the same of the
	ı				120111102001120	Full	APRIL 20 2015	W Fox		and the second
Fabricated: ±0.02					10420 RISING COURT	MATERIAL		APPROVED BY		and the second
Angular: ±1/2°	_					DRAWING NO		- 04		and the court of the
Surface finish 125	01	9/12/17	WF	Corrected fork part number	Phone: 630-427-2051 Fax: 630-427-1036		M350-67	<b>/-U1</b>		