


CONFIDENTIAL & PROPRIETARY

All data contained in this document is sole property of DRY SYSTEMS TECHNOLOGIES and is considered confidential and proprietary. This document may not be reproduced, released to third parties, or used for purposes other than for which it was furnished, without express written consent of DRY SYSTEMS TECHNOLOGIES. This document remains property of DRY SYSTEMS TECHNOLOGIES and must be returned upon request.

ALT. - Can be used with M332-105-01
 (6) Hex Head Screw 3/8-16 x 1.00
 (6) Lockwasher 3/8"Ø

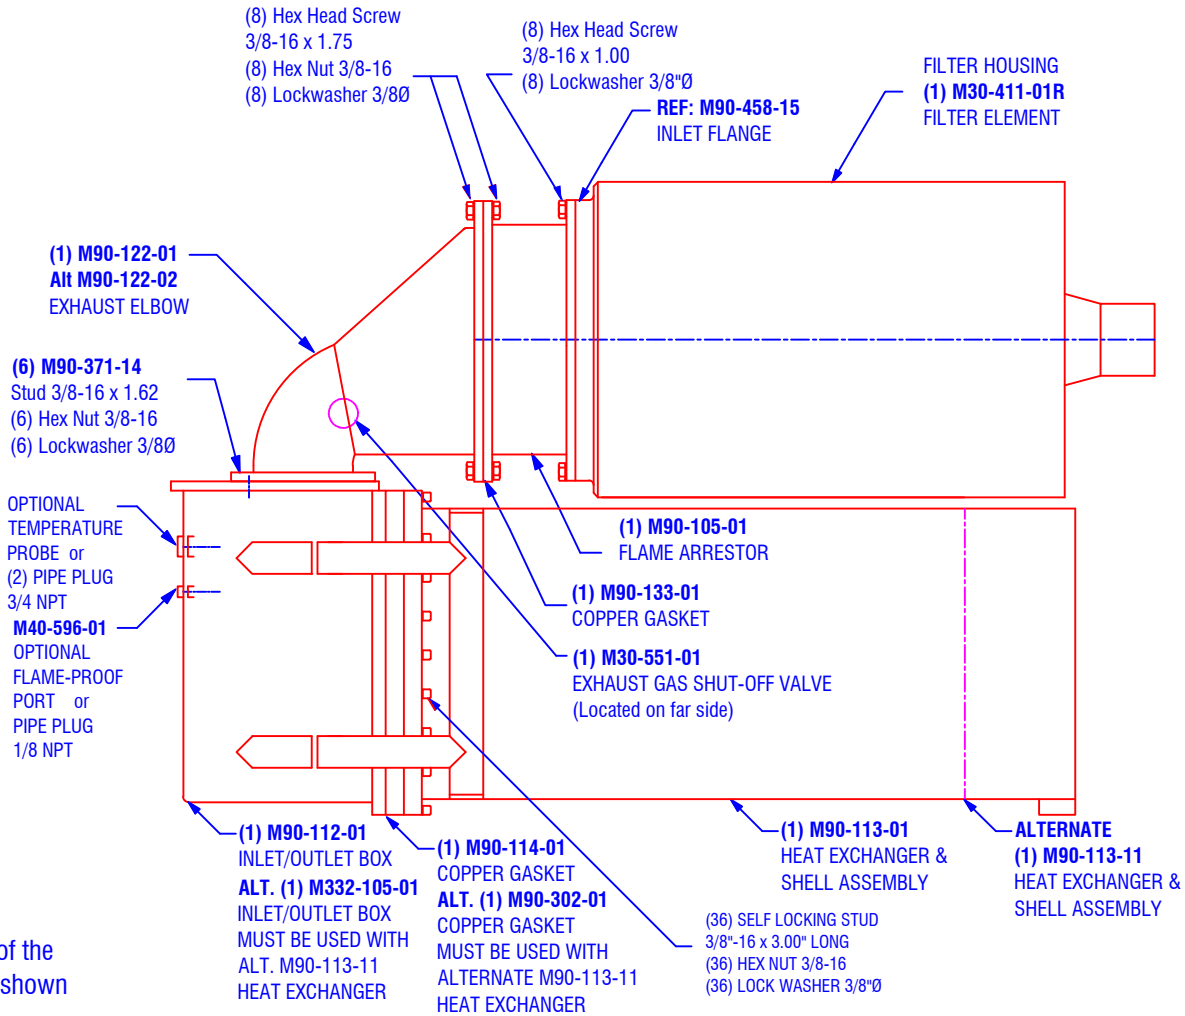

Components upstream of the Heat Exchanger are not shown in this drawing

DO NOT CHANGE THIS DRAWING WITHOUT MSHA APPROVAL

Cummins 8.3 Turbo

TOLERANCES		DRY SYSTEMS TECHNOLOGIES		DESCRIPTION: EXHAUST SIDEVIEW		NO. REVISION
Linear unless noted				SCALE: FULL	DATE: 17 Sept 05	DRAWN BY: R Gibbs
Machined: ±0.005				APPROVED BY:		
Fabricated: ±0.01				PARTIAL: See Detail Drawings		
Angular: ±1/2°				DRAWN TO: M250-102-32		
Surface finish 125				REV: 01 1008 RG Add Alt Heat Exch		
		8102 LEMONT ROAD, SUITE 700 WOODRIDGE, IL 60517 Phone: 630-427-2051 Fax: 630-427-1038 E-Mail: eng@dryssystemstech.com				